

Design And Analysis of lifting Hook

Mr. Kunjan Vanpariya, Prof. Vishal Pandya, Prof. Jayesh Koisha

Abstract— Lifting hooks are the components which are generally used to elevate the heavy load in industries and constructional sites. It is the member used for lifting the heavy mass using wire ropes and crane. The main objective of this paper is to establish a methodology to design and stress analysis of a lifting hook using stress distribution and changing the cross sections where the stress is minimum. A survey of literature for this subject has shown that, various CAD and FEA software used for modeling and analysis of a hook. The lifting hook is given by company and prepared the model in in proe wildfire 5.0 and analysis done in ansys 14. Using FEM, weight optimization done in ansys and remove the material where the stress is minimum.

Index Terms— Finite Element Method, Lifting hook, Curved Beam Theory.

I. INTRODUCTION

Lifting hooks are the components which are generally used to elevate the heavy load in industries and constructional sites. It is the member used for lifting the heavy mass using wire ropes and crane. The objective of this work is to carry out computer aided design and analysis of hook. In analysis of hook the load applied is 1.5tonne. The material of the hook is High Tensile Steel. The CAD modeling done in PROE Wildfire 5 and finite element analysis is done in ANSYS 14.

II. LITERATURE REVIEW

CAD model of a trapezoidal section prepared in CATIAV5R20 and then 2 ton load equivalent to 19620 N applied. In MATLAB, Design of experiments are applied by varying the length of two parallel side of the Trapezoidal Hook and studies on the basis of Stress, Mass, Displacement and Energy stored within the hook.[1], The comparative study by Mr. A Gopichand has shown that taguchi method can be used for optimization of crane hook. In his work optimization of design parameters is carried out using Taguchi method. He considered total three parameters and made mixed levels a L16 orthogonal array. The optimum combination of input parameters for minimum Vonmises stresses Are determined.[2], Nishant soni has worked on the optimization of low carbon steel for its self-weight. The self-weight and

Manuscript received April 10, 2015

Mr. Kunjan Vanpariya, PG Researcher, Machine Design, Birla Vishwakarma Mahavidyalaya Engineering College, V.V. Nagar, India

Prof. Vishal Pandya Assistant Professor, Mechanical Engineering Department, Birla Vishwakarma Mahavidyalaya Engineering College, V.V. Nagar, India

Prof. Jayesh Koisha Assistant Professor, Mechanical Engineering Department, Birla Vishwakarma Mahavidyalaya Engineering College, V.V. Nagar, India

component load coming on the crane-hook hence he worked with objective of the optimization of the mass for cane hook-under the effect of static load comprising the peak pressure load. He used finite element analysis for the shape optimization of crane hook as well as for validation of final geometry. He also considered geometry and manufacturing constrain during optimization process and results shows that optimized cane hook is 14% lighter then original crane hook.[3], The stress distribution pattern is verified for its correctness on model of crane hook using (Winkler Bach theory) for curved beams.[4], The hook was tested on the UTM machine in tension to located the area having maximum stress and located the yield point.[5].

III. MATERIAL ASSIGNMENT

Many industries manufacture Hook by high tensile steel (AISI4140) material. These materials are widely used for production of hook and beams of different cross sections. Other than the load carrying capacity of hook, it must also be able to absorb the vertical load and deflection.

Table 2.1 Chemical composition of material:


Element	C	Mn	P	S	Si	Cr	Mo
Weight %	0.38	0.75	0.035	0.004	0.15	0.80	0.15

Table 2.2 Mechanical properties of AISI4140

Mechanical property	Values	Unit
Elastic Modulus	190-210	GPa
Poisson's ratio	0.27-0.30	N/A
Density	7850	Kg/m ³
Tensile Strength	655	MPa
Yield Strength	417.1	MPa
Reduction in Area (%)	56.9	

IV. CROSS SECTION OF HOOK


There is a various cross section of hook available but trapezoidal section is most preferable because Trapezoidal section has thinner edge from inside and thicker edge from outside. Inner edge of hook acts as curved beam make it smoother to operate.



Design And Analysis of lifting Hook

V. MODELING OF HOOK

PRO-E is used to project the trajectory with the required dimensions along with advanced feature of Swept Blend for the generation of hook. Generated model is saved in the format of Step file.

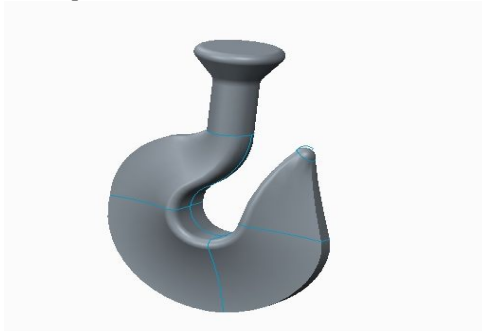

VI. METHODOLOGY

ANALYTICAL METHOD:

For the straight beam, the neutral axis of the cross section coincides with its centroidal axis and stress distribution is linear, but in case of curved beam, the neutral axis of cross section is shifted towards the Centre of curvature so stress distribution is not linear.

Resultant stress at inner surface of crane hook (σ_i):

$$\sigma_i = \frac{P}{A} + \frac{M c_i}{A e r_i}$$

P= load applied in N


M=Bending moment

A= Cross sectional Area

e = Distance between centroidal axis and neutral axis,

r_i = radius of inner fiber

r_o = radius of outer fiber



$$R_N = \frac{\left(\frac{b_i + b_o}{2}\right) h}{\left(\frac{b_i R_o - b_o R_i}{h}\right) \log_e \left(\frac{R_o}{R_i}\right) - (b_i - b_o)}$$

$$R_G = R_i + \frac{h(b_i + 2b_o)}{3(b_i + b_o)}$$

$$e = R_G - R_N$$

For 1.5 tonne capacity Load

P = 14715N

C=23.72mm

h = 35.4mm

b_i = 24.3mm

r_i = 11.86mm

r_o = 47.26mm

From the formula of r_n = 64.1869 mm

And r_g = 26.24mm

e = $r_g - r_n$ = 3.4935mm

c_i = $r_n - r_i$ = 10.8865 mm

Bending moment, M = P * r_n

$$= 3.347 * 10^6 \text{ N*mm}$$

Resultant stress at inner surface, (σ_i) =


$$\sigma_i = \frac{P}{A} + \frac{M c_i}{A e r_i}$$

$$\sigma_i = 190.7919 \text{ N/mm}^2$$

FINITE ELEMENT ANALYSIS


3D Model made in Proe Wildfire 5.0 and step file import in ANSYS, then analysis done with 1.5 tonne load applied.

Boundary condition as shown in fig.

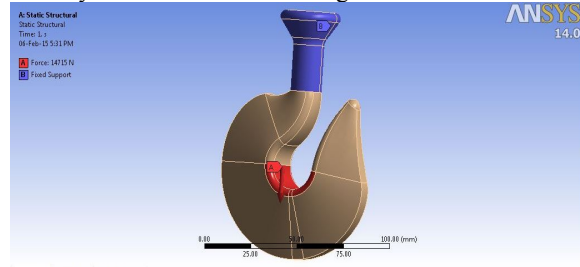


Meshing


Nodes:	35387
Elements:	22374

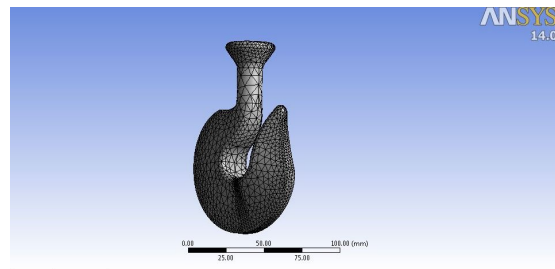


Von mises stress

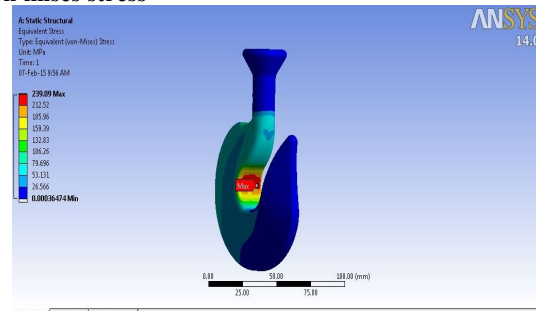

Remove the material where the stress concentration is higher so weight is reduced and prepare a new model according to new dimensions below:



By using FEM the stress value near about allowable stress and weight is also reduced. Analysis of lifting hook shown in fig and 1.5tonne load applied upper shank portion of hook is kept fixed and evaluated the results.

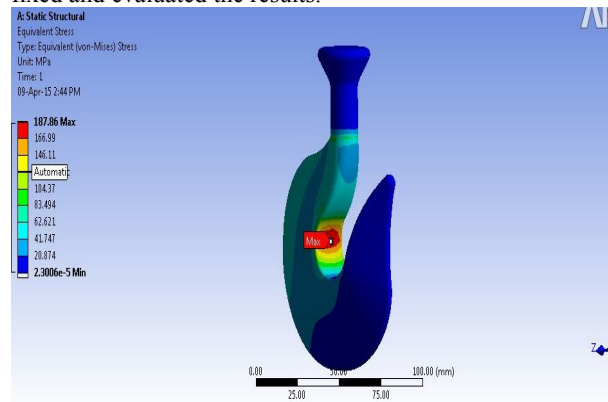

VII. RESULTS AND CONCLUSION

Results:

	Old model	New model
Weight(gm)	759	623
Stress(Mpa)	238	187

Stress induced and displacement in “Modified Lifting Hook” is least and stress concentration are distributed uniformly. It have less mass due to this we are able to save the material and balance economy.

FUTURE SCOPE

Further it is advisable to conduct photo elasticity test for the crane hook under investigation in order to get better insight for stress concentration. Also use optimization techniques for the reducing stress and weight of hook.

ACKNOWLEDGMENT

I would like to express my deep sense of gratitude and thanks to my guides Prof. V.A.Pandya and Prof. J.R.Koisha for their sincere and invaluable guidance, suggestions and sympathetic attitude which inspired me to submit this paper in the present form. My heartfelt thanks are also expressed to Dr. P.M. George for approving the topic and his constant encouragement in this pursuit.

REFERENCES

- [1] Santosh Shaun, Ritesh Dewangan, Manas Patnaik, Narendra Yadav; “ Study of Crane Hook Having Trapezoidal Section by Finite Element Method & Design of Experiments” International Journal of Modern Engineering Research Vol.2 Issue pp-2779-2781 ISSN: 2249-66454 July-Aug 2012.
- [2] Mr. A. Gopichand, Ms. R. V. S. Lakshmi, Mr. B. Maheshkrishna “Optimization of design parameter for crane hook using taguchi method” in international journals of innovative research in science ,engineering and technology, vol. 2, Dec 2013, ISSN: 2319-8753.
- [3] Nishant soni, “crane-hook shapes optimization and thermal analysis using finite element too” in international journal of advanced and innovation research”, ISSN: 2278-7844.

- [4] Yogesh Tripathi, U.K Joshi, ” comparison of stress between winkler-bach theory and ansys finite element method for crane hook with a trapezoidal cross-section. Vol. 2, issue 09, September-2013.
- [5] Ajeet Bergaley, Anshuman Purohit, ” Structural analysis of crane hook using finite element method”,vol.1, issue 10,September 2013.
- [6] Shigley’s Mechanical Engineering Design 9th edition, Richard G. Budynas, J.Keith Nisbett, Tata McGraw Hill Education Private Limited, page no.118-119.